



P4670I-U2

46" Large-Screen, Multi-Touch Display

QSR

Airports

Medical

Retail

At a Glance

- Multi-Touch
- HD LCD Display
- PulseIR Technology
- OPS Slot
- Industrial-Strength, Premium-Grade Panel



P4670I-U2

3500:1 Contrast Ratio

8ms Response Time

The P4670I-U2, a 46" professional-grade, large-screen, multi-touch display, boasts both strong performance and durability. Its HD LCD display offers crisp imagery and striking colors while its PulseIR (infra red) technology allows for the detection and tracking of multiple (from two points up to six) touch points. The infra red LEDs and other components are encased in a compact sheet metal frame over a tempered glass pane, meaning that the display requires no delicate handling or calibration.

Quick Service Restaurants (QSR)

The P4670I-U2 features an Open Pluggable Specification (OPS) slot, making it simple to connect components to run your digital signage.

Airports

The display is equipped with internal temperature sensors with self-diagnostics and fan-based technology, allowing for 24/7 operation.

Medical

The P4670I-U2's multi-touch system allows users to resize images and to swipe information across the display.

Retail

The P4670I-U2 has a slimmer depth and an industrial-strength, premium grade panel which allows it to function in a variety of retail environments, from tire stores to shoe stores.

Specifications

Viewable Image Size	46"
Color	Black
Brightness	500cd/m ²
Contrast Ratio	3500:1
Viewing Angle	178° Vertical; 178° Horizontal (89U/89D/89L/89R) @ CR>10
Response Time (Gray to Gray)	8ms
Aspect Ratio	16:9
Orientation	Landscape/Portrait
Synchronization	31.5-91.1kHz (Horizontal); 50-85Hz (Vertical)
Touch Screen (Fully Integrated)	PulseIR (infra red LED)
Touch Points	Two up to six
Connectivity Interfaces	DisplayPort, HDMI, DVI-D, VGA 15-pin D-sub, 5 BNC, S-Video, BNC Composite, RCA Audio, Stereo Mini-Jack (2), HDMI Audio, RS-232C, LAN, IR Remote, DDC/CI
PC Compatibility (Touch Drivers)	Windows 7, Vista, and XP; Linux; Mac OS
Native Resolution	1920 X 1080
Voltage Rating	3.9A @ 100-120V; 1.6A @ 220-240V
Power Consumption	On: 155W; ECO Mode Standby: <1W
Dimensions (WxHxD)	43.5 x 26.1 x 13.8 in (without stand)
Net Weight	87.5 lbs (without stand)
VESA Hole Configuration	300 X 300mm (4-hole)
Operating Temperature	41-104°F
Operating Humidity	20-80%
Standards	FCC Class B, CE, UL, Energy Star 5.0, RoHS Compliant
Limited Warranty	3 Years, Parts and Labor, including Backlight

Contact Us

220 Tradesmen Dr.
Hutto, Texas 78634

1.800.320.5944

sales@touchsystems.com

www.touchsystems.com



P4670I-U2

46" Large-Screen, Multi-Touch Display

QSR

Airports

Medical

Retail

At a Glance

- Multi-Touch
- HD LCD Display
- PulseIR Technology
- OPS Slot
- Industrial-Strength, Premium-Grade Panel




P4670I-U2

3500:1 Contrast Ratio

8ms Response Time

Mechanical Drawings

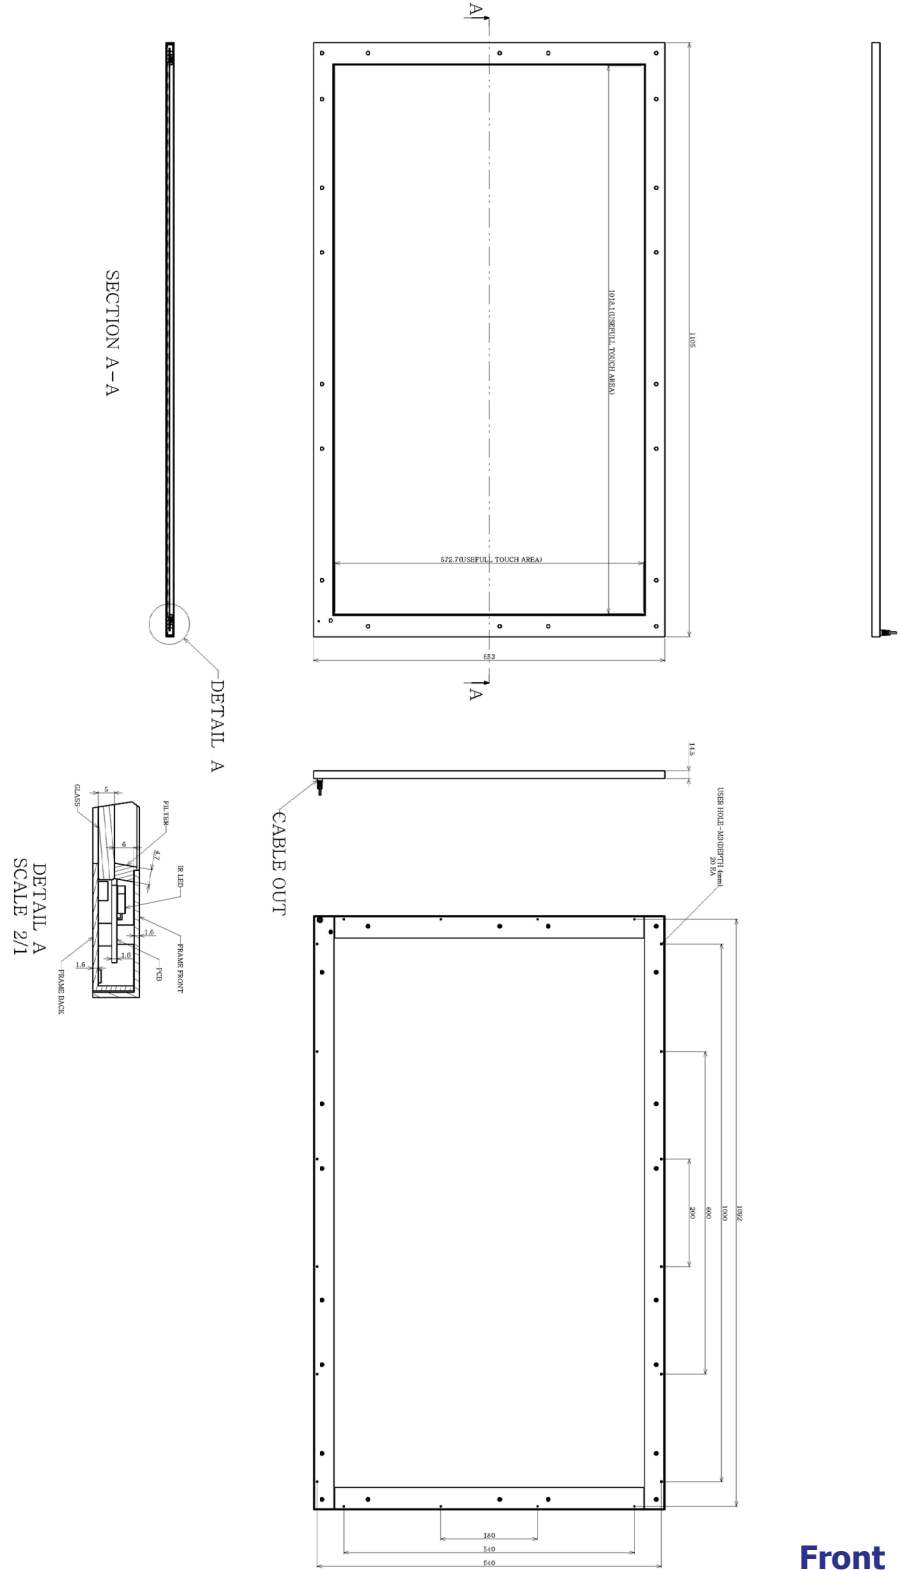

Front

Contact Us

220 Tradesmen Dr.
Hutto, Texas 78634

1.800.320.5944

sales@touchsystems.com

www.touchsystems.com



P4670I-U2

46" Large-Screen, Multi-Touch Display

QSR

Airports

Medical

Retail

At a Glance

- Multi-Touch
- HD LCD Display
- PulseIR Technology
- OPS Slot
- Industrial-Strength, Premium-Grade Panel


Mechanical Drawings



P4670I-U2

3500:1 Contrast Ratio

8ms Response Time

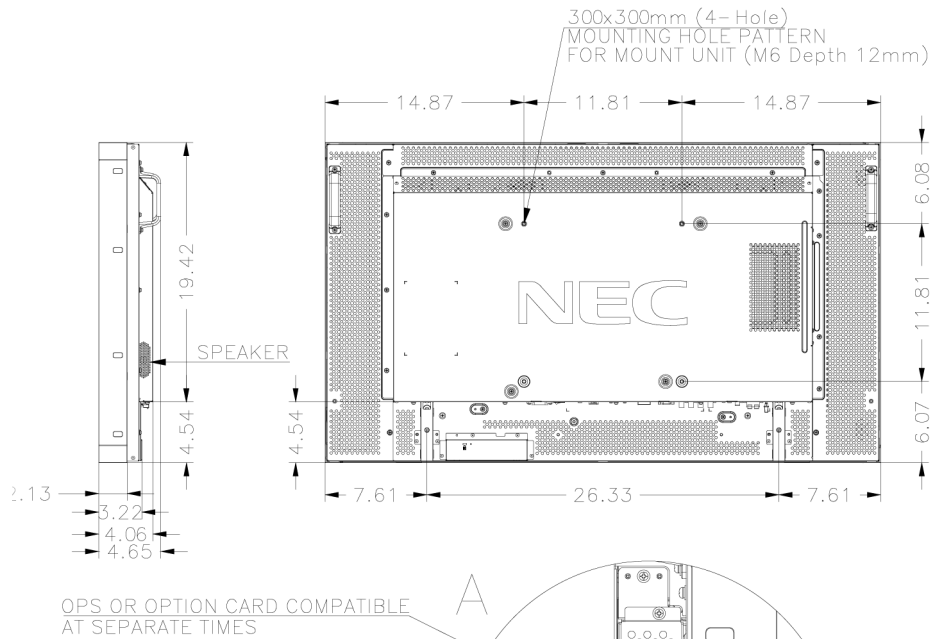

Back

Contact Us

220 Tradesmen Dr.
Hutto, Texas 78634

1.800.320.5944

sales@touchsystems.com

www.touchsystems.com